DESCRIPTION
FRS-387S

APPLICATIONS:

- Industrial Screwdriver
- Hair Clipper

DRAWING

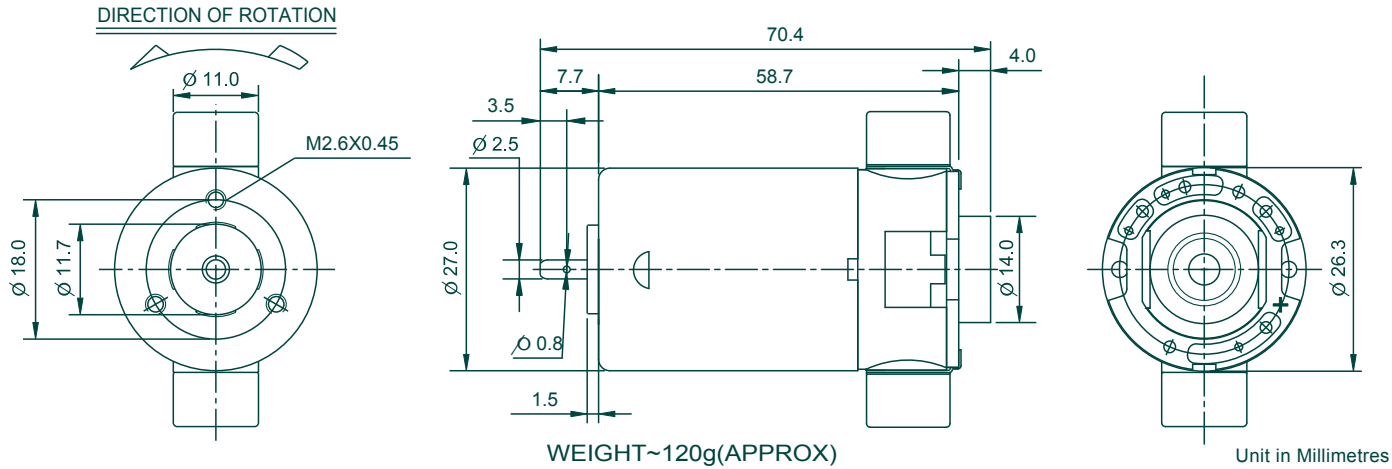

WEIGHT~120g(APPROX)

Unit in Millimetres

PERFORMANCE DATA

OUTPUT : APPROX 1.0 ~ 20W

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					AT MAXIMUM POWER			STALL		NOISE
	OPERATING RANGE	NOMINA	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFF	SPEED	CURRENT	TORQUE	TORQUE	CURRENT	(Max)
	V	V	R.P.M	A	R.P.M	A	gf.cm	W	%	R.P.M	A	gf.cm	gf.cm	A	dBA / 300mm
FRS-387S-1963	12.0~30.	24.0	1513	0.16	1260	0.70	93.0	12.0	71.4	7569	1.77	277.	55	3.38	6
FRS-387S-1973	12.0~30.	24.0	1350	0.18	1108	0.65	90.0	10.2	65.6	6750	1.49	251.	50	2.80	6
FRS-387S-1780	20.0~40.	30.0	1500	0.16	1230	0.65	90.0	11.4	58.0	7500	1.52	250.	50	2.88	7
FRS-387S-1973	20.0~40.	30.0	1650	0.18	1340	0.75	100.	13.7	60.9	8250	1.70	266.	53	3.21	7